

**BE4-320L**

8,5mt  
HYDRAULIC

359°

HEADLIGHTS		MAX HEIGHT
N	TYPE	MT
4	320W LED	8,5




*The images are only for demonstration purposes*

WEIGHT	DIMENSIONS [MM]		
kg	L	W	H MIN/MAX
550	1200	1000	2300 / 8500



MADE IN SWEDEN

**LIGHTING DETAILS** **BE4-320L**

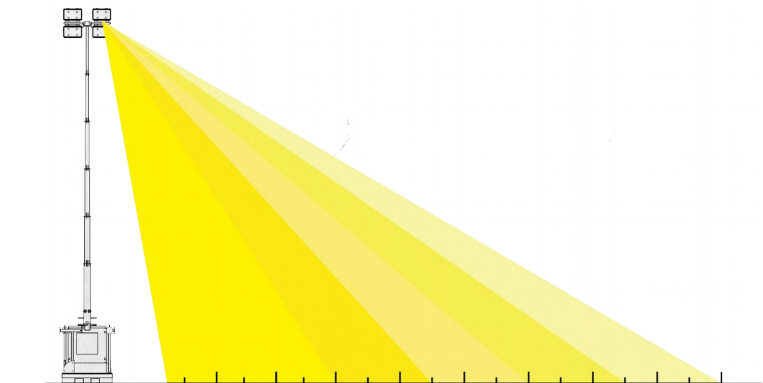


<b>Light</b>	<i>Headlights</i>		4 x 320W
	<i>Headlights type</i>		LED
	<i>Lumen each</i>	lm	41550
	<i>Lightable area</i>	m <sup>2</sup>	5000 @ 5 lux

**TECHNICAL DETAILS**

<b>General</b>	<i>Max height</i>	mt	8,5
	<i>Lifting system type</i>		Hydraulic
	<i>Rotation</i>		359°
	<i>Maximum wind resistance</i>	km/h	110
	<i>Voltage and frequency</i>	V – Hz	230V – 50Hz

**CONNECTION IN SERIES OF MULTIPLE UNITS**

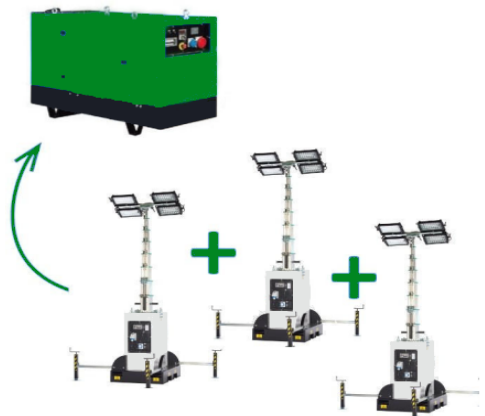

The lighting tower BE TOWER has an input plug and an output socket 16A 230V for the connection in series of several units. This makes it possible to connect several lighting units to a single source of energy.

All data can be found out in the original technical datasheet of the engine and the alternator. Values shown are nominal values, they can change in every moment and without warning.

## STANDARD EQUIPMENT

### LIGHTING TOWER

*8,5mt height telescopic rod*  
*Telescopic motorized hydraulic rod*  
*n.4 320W LED lights*  
*Manual headlights positioning*  
*Electric control panel*

### GENERAL

*Power socket 16A 3P*  
*Power plug 16A 3P*  
*n.8 guides for forklift forks*  
*n.4 stabilizers*

## OPTIONALS

*Light sensor for automatic start*



*Different number, power and kind of lights (halogen, metal halide, led)*

**Greenpower AB**  
Helsingborgsvägen Varalöv,  
262 96 Ängelholm, Sweden  
Phone: +46 43122240  
Email: [info@greenpower.se](mailto:info@greenpower.se)  
Web: [www.greenpower.se](http://www.greenpower.se)