

BE6-160L



8,5mt
HYDRAULIC

359°

HEADLIGHTS –		MAX HEIGHT
N	TYPE	MT
6	160W LED	8,5




The images are only for demonstration purposes

WEIGHT	DIMENSIONS [MM]		
kg	L	W	H MIN/MAX
550	1200	1000	2300 / 8500



MADE IN SWEDEN


LIGHTING DETAILS **BE6-160L**

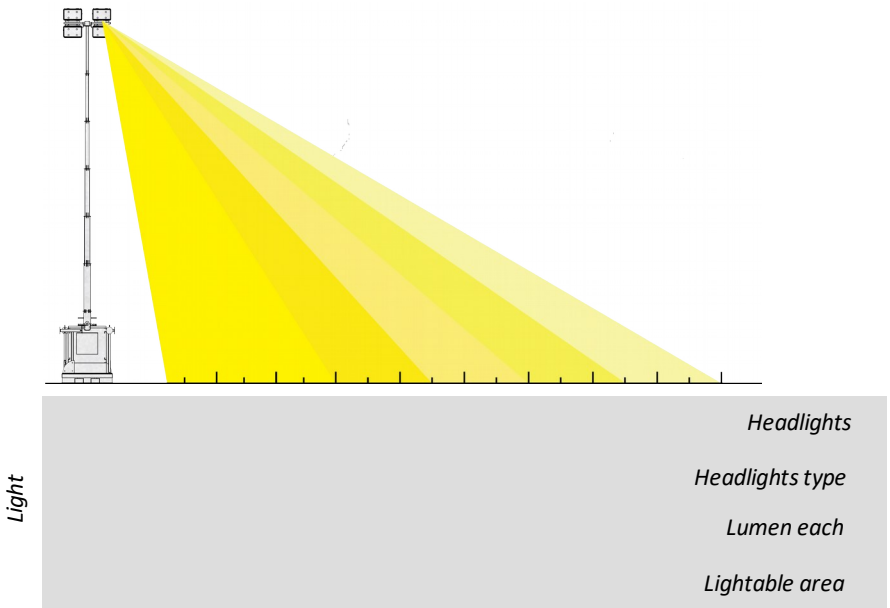

Light

Headlights		6 x 160W
Headlights type		LED
Lumen each	lm	20350
Lightable area	m ²	4200 @ 5 lux


TECHNICAL DETAILS

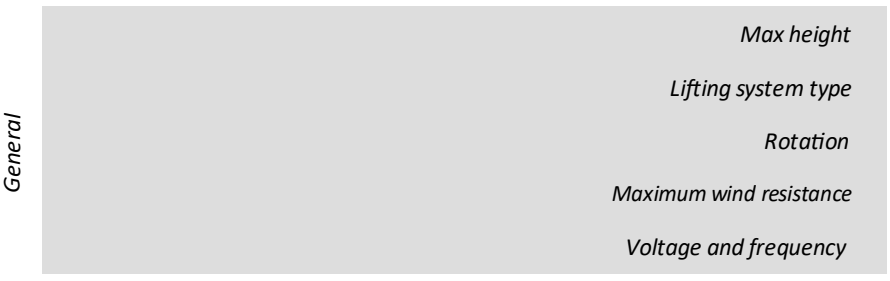

General

Max height	mt	8,5
Lifting system type		Hydraulic
Rotation		359°
Maximum wind resistance	km/h	110
Voltage and frequency	V – Hz	230V – 50Hz

CONNECTION IN SERIES OF MULTIPLE UNITS

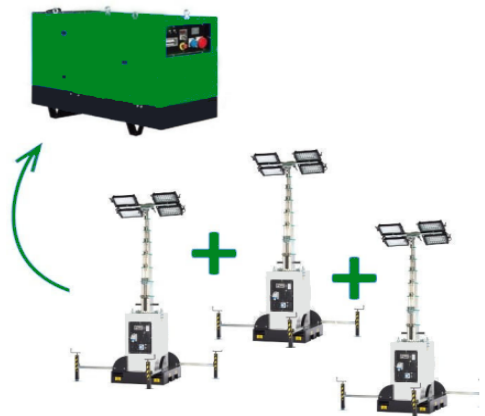

The lighting tower BE TOWER has an input plug and an output socket 16A 230V for the connection in series of several units. This makes it possible to connect several lighting units to a single source of energy.

All data can be found out in the original technical datasheet of the engine and the alternator. Values shown are nominal values, they can change in every moment and without warning.

STANDARD EQUIPMENT

LIGHTING TOWER

8,5mt height telescopic rod
Telescopic motorized hydraulic rod
n.6 160W LED lights
Manual headlights positioning
Electric control panel

GENERAL

Power socket 16A 3P
Power plug 16A 3P
n.8 guides for forklift forks
n.4 stabilizers

OPTIONALS

Light sensor for automatic start



Different number, power and kind of lights (halogen, metal halide, led)

Greenpower AB
Helsingborgsvägen Varalöv,
262 96 Ängelholm, Sweden
Phone: +46 43122240
Email: info@greenpower.se
Web: www.greenpower.se