

MR2-160L



7-5,5mt

360°

HEADLIGHTS		MAX HEIGHT
N	TYPE	MT
2	160W LED	5,5 -7



The images are only for demonstration purposes


MR2-160L – 5,5mt

WEIGHT	DIMENSIONS [MM]		
kg	L [min/max]	W [min/max]	H [min/max]
97	350 / 2200	350 / 2200	2050 / 5700



LIGHTING DETAILS

**MR2-160L
MRA2-160L**

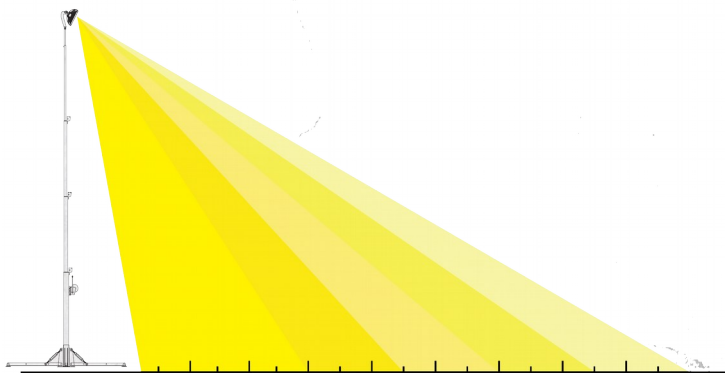

<i>Luce – Light</i>	<i>Headlights</i>		2 x 160W
	<i>Headlights type</i>		LED
	<i>Lumen each</i>	lm	20350
	<i>Lightable area</i>	m ²	1500 [5,5mt] 1800 [7mt]

TECHNICAL DETAILS

<i>General</i>	<i>Max height</i>	mt	5,5 – 7
	<i>Lifting system type</i>		Manual
	<i>Rotation</i>		360°
	<i>Maximum wind resistance</i>	km/h	60
	<i>Voltage and frequency</i>	V – Hz	230V – 50Hz

All data can be found out in the original technical datasheet of the engine and the alternator. Values shown are nominal values, they can change in every moment and without warning.

STANDARD EQUIPMENT

LIGHTING TOWER

- 5,5 or 7mt height telescopic rod
- Telescopic rod with manual lifting system
- n.2 160W LED lights
- Manual headlights positioning
- Power plug 16A 230V
- n.4 stabilizers

OPTIONALS

Light sensor for automatic start



Different number, power and kind of lights (halogen, metal halide, led)

Version available with support bracket and 360° rotation system



Greenpower AB
Helsingborgsvägen Varalöv,
262 96 Ängelholm, Sweden
Phone: +46 43122240
Email: info@greenpower.se
Web: www.greenpower.se