

**MR4-160L**  
**MRA4-160L**



7-5,5mt

360°

HEADLIGHTS		MAX HEIGHT
N	TYPE	MT
4	160W LED	5,5 -7




The images are only for demonstration purposes

**MR4-160L – 5,5mt**

WEIGHT	DIMENSIONS [MM]		
kg	L [min/max]	W [min/max]	H [min/max]
105	350 / 2200	350 / 2200	2050 / 5700

**LIGHTING DETAILS** **MR4-160L**

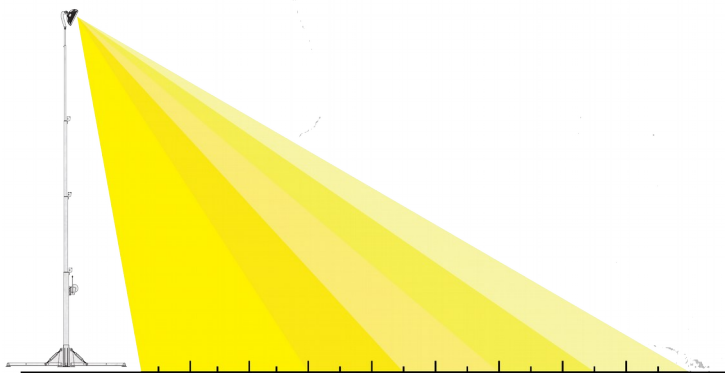

<i>Light</i>	<i>Headlights</i>		4 x 160W
	<i>Headlights type</i>		LED
	<i>Lumen each</i>	lm	20350
	<i>Lightable area</i>	m <sup>2</sup>	2200 [5,5mt] 2600 [7mt]

**TECHNICAL DETAILS**

<i>General</i>	<i>Max height</i>	mt	5,5 – 7
	<i>Lifting system type</i>		Manuale – Manual – Manuel
	<i>Rotation</i>		360°
	<i>Maximum wind resistance</i>	km/h	60
	<i>Voltage and frequency</i>	V – Hz	230V – 50Hz

## STANDARD EQUIPMENT

LIGHTING TOWER

- 5,5 or 7mt height telescopic rod
- Telescopic rod with manual lifting system
- n.4 160W LED lights
- Manual headlights positioning
- Power plug 16A 230V
- n.4 stabilizers

## OPTIONALS

*Light sensor for automatic start*



*Different number, power and kind of lights (halogen, metal halide, led)*

*Version available with support bracket and 360° rotation system*



**Greenpower AB**  
Helsingborgsvägen Varalöv,  
262 96 Ängelholm, Sweden  
Phone: +46 43122240  
Email: [info@greenpower.se](mailto:info@greenpower.se)  
Web: [www.greenpower.se](http://www.greenpower.se)