

MR4-75L
MRA4-75L

7-5,5mt

360°

HEADLIGHTS		MAX HEIGHT
N	TYPE	MT
4	75W LED	5,5 - 7



The images are only for demonstration purposes

MR4-75L – 5,5mt

WEIGHT	DIMENSIONS [MM]		
kg	L [min/max]	W [min/max]	H [min/max]
97	350 / 2200	350 / 2200	2050 / 5700


MRA4-75L – 7mt

WEIGHT	DIMENSIONS [MM]		
kg	L [min/max]	W [min/max]	H [min/max]
107	350 / 2200	350 / 2200	2500 / 7300



LIGHTING DETAILS

**MR4-75L
MR4A-75L**

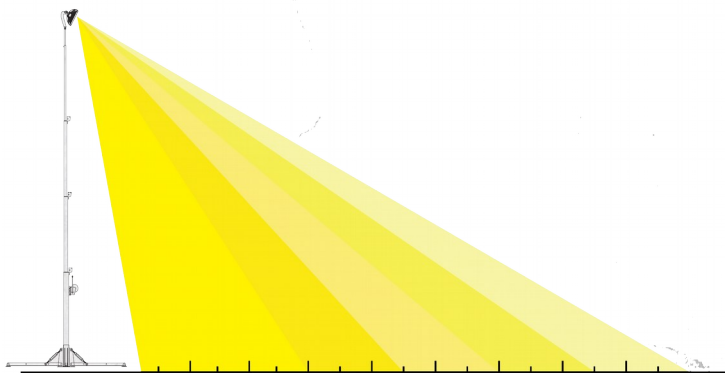

<i>Light</i>	<i>Headlights</i>		4 x 75W
	<i>Headlights type</i>		LED
	<i>Lumen each</i>	lm	9225
	<i>Lightable area</i>	m ²	1500 [5,5mt] 1800 [7mt]

TECHNICAL DETAILS

<i>General</i>	<i>Max height</i>	mt	5,5 – 7
	<i>Lifting system type</i>		Manual
	<i>Rotation</i>		360°
	<i>Maximum wind resistance</i>	km/h	60
	<i>Voltage and frequency</i>	V – Hz	230V – 50Hz

STANDARD EQUIPMENT

LIGHTING TOWER

5,5 or 7mt height telescopic rod

Telescopic rod with manual lifting system

n.4 75W LED lights

Manual headlights positioning

Power plug 16A 230V

n.4 stabilizers

OPTIONALS

Light sensor for automatic start



Different number, power and kind of lights (halogen, metal halide, led)

Version available with support bracket and 360° rotation system



Greenpower AB
Helsingborgsvägen Varalöv,
262 96 Ängelholm, Sweden
Phone: +46 43122240
Email: info@greenpower.se
Web: www.greenpower.se