

MR4-160L
MRA4-160L



7-5,5mt

360°

HEADLIGHTS		MAX HEIGHT
N	TYPE	MT
4	160W LED	5,5 - 7




The images are only for demonstration purposes

MRA4-160L – 7mt

WEIGHT	DIMENSIONS [MM]		
kg	L [min/max]	W [min/max]	H [min/max]
115	350 / 2200	350 / 2200	2500 / 7300



LIGHTING DETAILS MR4-160L

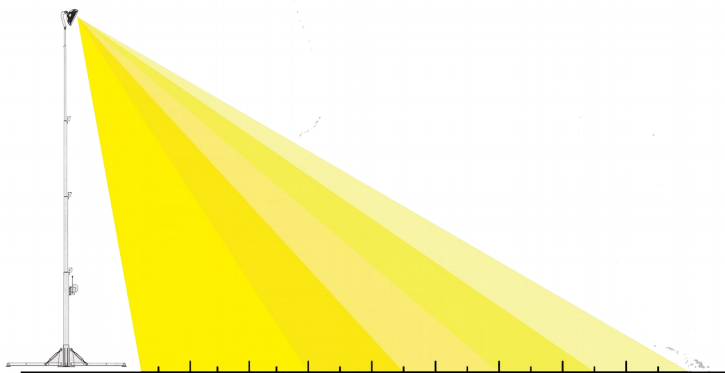

<i>Light</i>	<i>Headlights</i>		4 x 160W
	<i>Headlights type</i>		LED
	<i>Lumen each</i>	lm	20350
	<i>Lightable area</i>	m ²	2200 [5,5mt] 2600 [7mt]

TECHNICAL DETAILS

<i>General</i>	<i>Max height</i>	mt	5,5 – 7
	<i>Lifting system type</i>		Manuale – Manual – Manuel
	<i>Rotation</i>		360°
	<i>Maximum wind resistance</i>	km/h	60
	<i>Voltage and frequency</i>	V – Hz	230V – 50Hz

STANDARD EQUIPMENT

LIGHTING TOWER

- 5,5 or 7mt height telescopic rod*
- Telescopic rod with manual lifting system*
- n.4 160W LED lights*
- Manual headlights positioning*
- Power plug 16A 230V*
- n.4 stabilizers*

OPTIONALS

Light sensor for automatic start



Different number, power and kind of lights (halogen, metal halide, led)

Version available with support bracket and 360° rotation system



Greenpower AB
Helsingborgsvägen Varalöv,
262 96 Ängelholm, Sweden
Phone: +46 43122240
Email: info@greenpower.se
Web: www.greenpower.se