

OK4-320L

8,5mt
HYDRAULIC
359°
KOHLER
1500-1800
61 dB(A) @ 7mt

HEADLIGHTS		MAX HEIGHT
N	TYPE	MT
4	320W LED	8,5



The images are only for demonstration purposes


WEIGHT	DIMENSIONS [MM]		
kg	L	W	H MIN/MAX
810	1200	1130	2450 / 8500

ENVIRONMENTAL CONDITIONS	
Temperature	40° C
Height	1000 mslm
Humidity	60,00%



LIGHTING DETAILS

OK4-320L

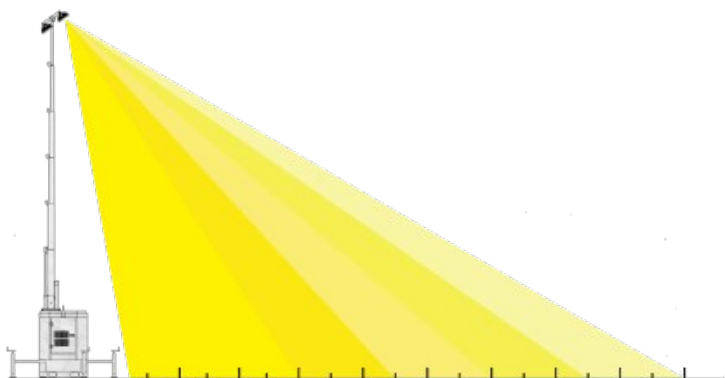

<i>Light</i>	<i>Headlights</i>		4 x 320W
	<i>Headlights type</i>		LED
	<i>Lumen each</i>	lm	41550
	<i>Lightable area</i>	m ²	5000 @ 5 lux

TECHNICAL DETAILS

<i>General</i>	<i>Max height</i>	mt	8,5
	<i>Lifting system type</i>		<i>Hydraulic</i>
	<i>Rotation</i>		359°
	<i>Maximum wind resistance</i>	km/h	110
	<i>Prime power</i>	kVA (kW)	3,5 (3,5)
	<i>Voltage and frequency</i>	V – Hz	230V – 50Hz
	<i>Tank capacity</i>	Lt	140
	<i>Autonomy with working headlights</i>	hr	280
<i>Engine</i>	<i>Engine</i>		KOHLER KDW702
	<i>Engine power</i>	Hp (kW)	6,6 (4,9)
	<i>Nr. of cylinders</i>		<i>in line</i>
	<i>Displacement</i>	cc	686
	<i>Aspiration</i>		<i>Nat. Aspirated</i>
	<i>Cooling system</i>		<i>Water</i>
	<i>Rpm</i>		1500
<i>Alternator</i>	<i>Alternator</i>		LINZ ELECTRIC
	<i>Number of poles</i>		4
	<i>Type</i>		<i>Brushless</i>
	<i>Voltage regulation</i>		<i>Capacitor</i>

STANDARD EQUIPMENT

LIGHTING TOWER

8,5mt height telescopic rod
Telescopic motorized hydraulic rod
n.4 320W LED lights
Manual headlights positioning
Standard twilight sensor
Electric control panel

GENERAL

Diesel engine
Single-phase alternator
12V battery
First oil filling
61dB(A) at 7mt soundproofed canopy
Service power socket 230V (max 1,8kVA)
n.8 guides for forklift forks
n.4 stabilizers

OPTIONALS



Different number, power and kind of lights (halogen, metal halide, led)

Greenpower AB

Helsingborgsvägen Varalöv,
262 96 Ängelholm, Sweden

Phone: +46 43122240

Email: info@greenpower.se

Web: www.greenpower.se