

OK6-160L



8.5mt
HYDRAULIC



65dB(A) @ 7mt

HEADLIGHTS		MAX HEIGHT
N	TYPE	MT
6	160W LED	8,5



The images are only for demonstration purposes

WEIGHT	DIMENSIONS [MM]		
	L	W	H MIN/MAX
kg			
810	1200	1130	2450 / 8500


ENVIRONMENTAL CONDITIONS

Temperature	40° C
Height	1000 mslm
Humidity	60,00%



LIGHTING DETAILS

OK6-160L

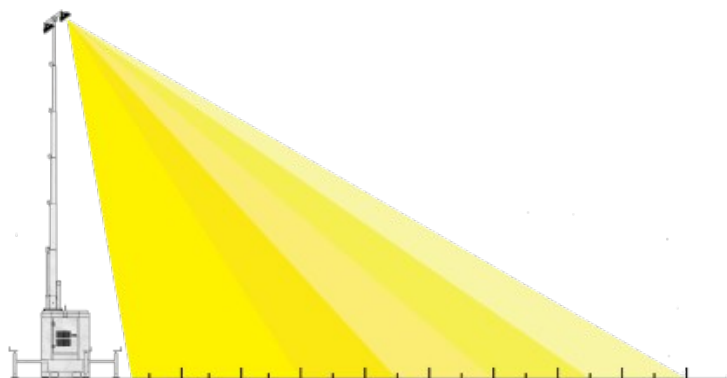

Light

<i>Headlights</i>		6 x 160W
<i>Headlights type</i>		LED
<i>Lumen each</i>	lm	20350
<i>Lightable area</i>	m ²	4200 @ 5 lux

TECHNICAL DETAILS

General

<i>Max height</i>	mt	8,5
<i>Lifting system type</i>		Hydraulic
<i>Rotation</i>		359°
<i>Maximum wind resistance</i>	km/h	110
<i>Prime power</i>	kVA (kW)	3,5 (3,5)
<i>Voltage and frequency</i>	V – Hz	230V – 50Hz
<i>Tank capacity</i>	Lt	140
<i>Autonomy with working headlights</i>	hr	290

Engine

<i>Engine</i>		KOHLER KDW702
<i>Engine power</i>	Hp (kW)	6,6 (4,9)
<i>Nr. of cylinders</i>		in line
<i>Displacement</i>	cc	686
<i>Aspiration</i>		Nat. Aspirated
<i>Cooling system</i>		Water
<i>Rpm</i>		1500

Alternator

<i>Alternator</i>		LINZ ELECTRIC
<i>Number of poles</i>		4
<i>Type</i>		Brushless
<i>Voltage regulation</i>		Capacitor

STANDARD EQUIPMENT

LIGHTING TOWER

8,5mt height telescopic rod
Telescopic motorized hydraulic rod
n.6 160W LED lights
Manual headlights positioning
Standard twilight sensor
Electric control panel

GENERAL

Diesel engine
Single-phase alternator
12V battery
First oil filling
61dB(A) at 7mt soundproofed canopy
Service power socket 230V (max 1,8kVA)
n.8 guides for forklift forks
n.4 stabilizers

OPTIONALS



Different number, power and kind of lights (halogen, metal halide, led)

Greenpower AB
Helsingborgsvägen Varalöv,
262 96 Ängelholm, Sweden
Phone: +46 43122240
Email: info@greenpower.se
Web: www.greenpower.se