

# OKB4-160L



8,5mt

359°



BATTERY

HYDRAULIC

HEADLIGHTS		MAX HEIGHT
N	TYPE	MT
4	160W LED	8,5




The images are only for demonstration purposes

WEIGHT	DIMENSIONS [MM]		
kg	L	W	H MIN/MAX
910	1200	1130	2450 / 8500

ENVIRONMENTAL CONDITIONS	
Temperature	40° C
Height	1000 mslm
Humidity	60,00%



**LIGHTING DETAILS** **OKB4-160L**

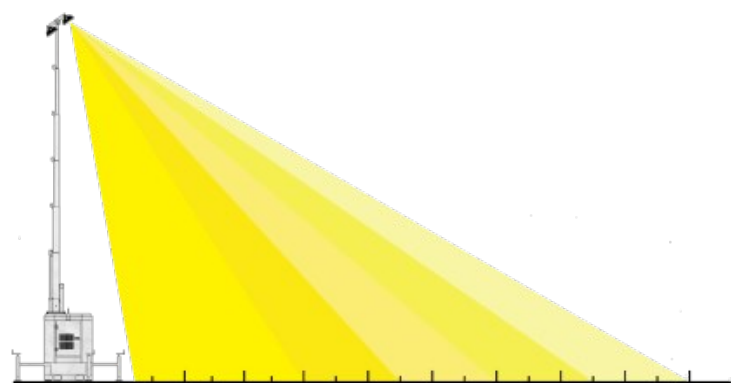

<b>Light</b>	<i>Headlights</i>		4 x 160W
	<i>Headlights type</i>		LED
	<i>Lumen each</i>	lm	20350
	<i>Lightable area</i>	m <sup>2</sup>	3000 @ 5 lux

**TECHNICAL DETAILS**

<b>General</b>	<i>Max height</i>	mt	8,5
	<i>Lifting system type</i>		Hydraulic
	<i>Rotation</i>		359°
	<i>Maximum wind resistance</i>	km/h	110
	<i>Voltage and frequency</i>	V – Hz	230V – 50Hz
	<i>Autonomy with 30% working headlights</i>	hr	60
<b>Battery</b>	<i>Battery technology</i>		AGM 2V
	<i>Energy management technology</i>		Inverter
	<i>Battery pack capacity</i>	Ah	400
	<i>Battery quantity</i>		12
	<i>Battery recharge time</i>	hr	12
	<i>Expected battery lifetime</i>		400 cycles
<b>Advantages</b>	<i>Maintenances costs</i>		
	<i>Fuel costs</i>		
	<i>Noise level</i>		
	<i>Polluting emissions</i>		

*All data can be found out in the original technical datasheet of the engine and the alternator. Values shown are nominal values, they can change in every moment and without warning.*

STANDARD EQUIPMENT

LIGHTING TOWER

*8,5mt height telescopic rod*

*Telescopic motorized hydraulic rod*

*n.4 160W LED lights*

*Manual headlights positioning*

*Dimmable lights (100-60-50-30%)*

*Standard twilight sensor*

*Electric control panel with inverter*

GENERAL

*12x2V AGM battery pack*

*Service power socket 230V (max 1,8kVA)*

*n.8 guides for forklift forks*

*n.4 stabilizers*

**Greenpower AB**

Helsingborgsvägen Varalöv,  
262 96 Ängelholm, Sweden

Phone: +46 43122240

Email: [info@greenpower.se](mailto:info@greenpower.se)

Web: [www.greenpower.se](http://www.greenpower.se)