

TP6-75L



7 mt
MANUAL

360°

HEADLIGHTS		MAX HEIGHT
N	TYPE	MT
6	75W LED	7




The images are only for demonstration purposes

WEIGHT	DIMENSIONS [MM]		
kg	L	W	H MIN/MAX
235	930	800	2300 / 7000



LIGHTING DETAILS

TP6-75L

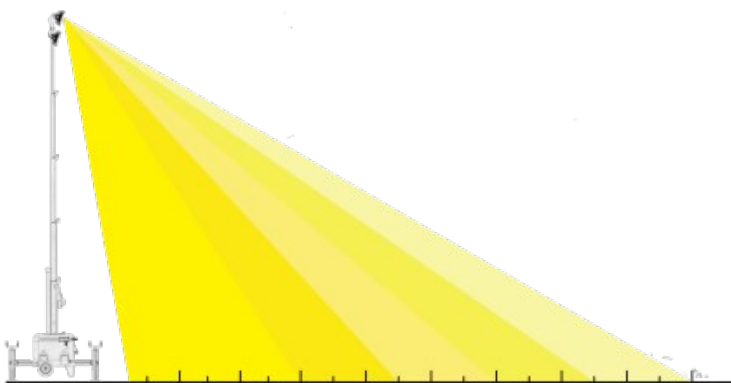

Light	Headlights		6 x 75W
	Headlights type		LED
	Lumen each	lm	9225
	Lightable area	m ²	2400 @ 5 lux

TECHNICAL DETAILS

General	Max height	mt	7
	Lifting system type		Manual
	Rotation		360°
	Maximum wind resistance	km/h	80
	Voltage and frequency	V – Hz	230V – 50Hz

CONNECTION IN SERIES OF MULTIPLE UNITS



The lighting tower BE TOWER has an input plug and an output socket 16A 230V for the connection in series of several units. This makes it possible to connect several lighting units to a single source of energy.

STANDARD EQUIPMENT

LIGHTING TOWER

7mt height telescopic rod
Telescopic rod with manual lifting system
n.6 75W LED lights
Manual headlights positioning
Electric control panel

GENERAL

Power socket 16A 3P
Power plug 16A 3P
Retractable handles
n.6 guides for forklift forks
n.4 stabilizers

OPTIONALS



Light sensor for automatic start

Two front castor wheels



Different number, power and kind of lights (halogen, metal halide, led)

Greenpower AB

Helsingborgsvägen Varalöv,
262 96 Ängelholm, Sweden

Phone: +46 43122240

Email: info@greenpower.se

Web: www.greenpower.se